
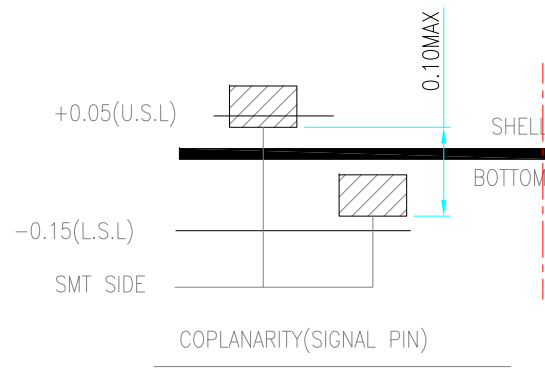


REV.	DESCRIPTION	DATE
A	RELEASED	2020/04/11



NOTES:

1,MATERIAL:

- 1-1.HOUSING:THERMOPLASTIC,UL94V-0,COLOR:WHITE;
- 1-2,CONTACT:COPPER ALLOY T=0.15MM;
- 1-3,SHELL:SUS T=0.30mm

2,FINISH:






- 2-1.CONTACT:GOLD FLASH PLATING ON CONTACT AREA AND SOLDER TAILS, Ni 50u" MIN. UNDERPLATING OVERALL;
- 2-2,SHELL: PLATING ALL OVER NICKEL 50u" Min.

3,SPECIFICATIONS:

- 3-1.VOLTAGE RATING: 100VAC
- 3-2.CURRENT RATING: PIN1/PIN5 3.0A Max
PIN2/PIN3/PIN4 1.0A Max
- 3-3.INSULATION RESISTANCE:100MEG.OHM MAX
- 3-4.CONTACT RESISTANCE:50 MILL.OHM MAX
- 3-5.OPERATION TEMPERATURE:-20*TO+65*
- 3-6.INSERT FORCE: 35N MAX
- 3-7.EXTRACT FORCE: 8N MIN
- 3-8.DURABILITY:10000CYCLES

PART NUMBER INFORMATION :

SERIES CODE	230F205	-XN150S-X	R:RoHS
SMT 90°			H:HALOGEN FREE
FEMALE			FOLLOW NUMBER
MICRO USB			BOARD TYPE
NUMBER OF POSITIONS			SHELL PLATING:
			T:TIN PLATED
			N:NI PLATED
			PLATING SEE TABLE

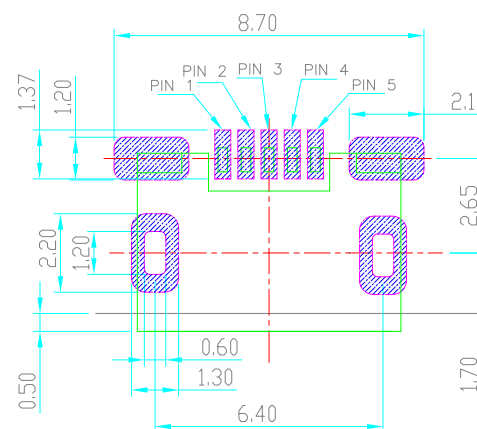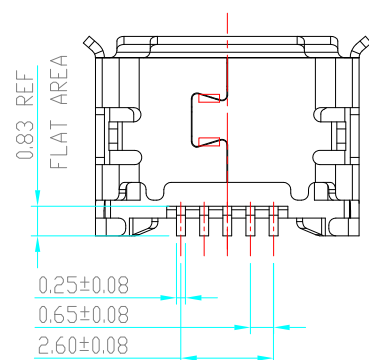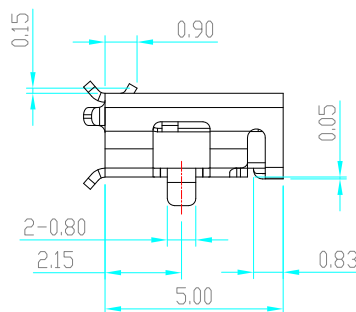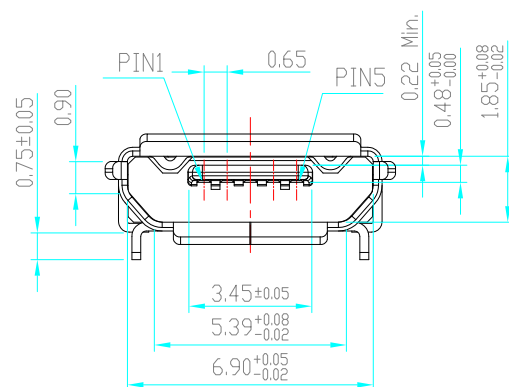

RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05
TOP VIEW

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	H	G/F + TIN
TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER XU CHECK LU APP'D HAWK PRODUCT SPEC. —	
UNITS : mm		INMO 东莞市英墨电子有限公司 INMO Electronics Co.,Ltd	
SCALE 1:6		NAME MICRO USB 5P/F DIP6.4 (0.25T, 翻边)	
SIZE A4		DRAW NO. R230F205—XT150S—X	
SHEET 1 OF 1		REV. A	