
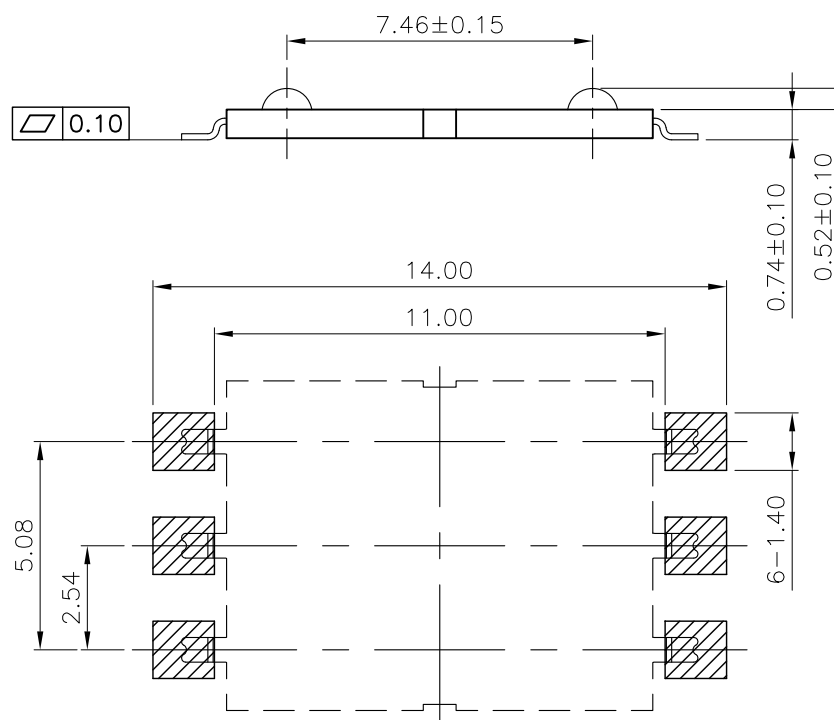


REV.	DESCRIPTION	DATE
A	RELEASE	NOV 29, 2011

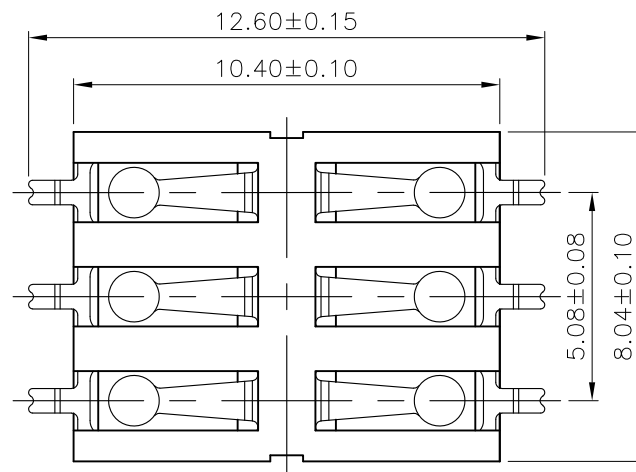

RECOMMEND PCB LAYOUT TOP VIEW
TOLERANCE: ± 0.05

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0) .
2. TERMINAL : COPPER ALLOY ,
PLATING : PLATING SEE TABLE .

SPECIFICATION

1. CURRENT RATING : 0.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 1000M Ω MIN.AT 500V DC.
4. CONTACT RESISTANCE : 50m Ω MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

PART NUMBER INFORMATION :

5100106-X2001S-X

SERIES CODE | SMT 90° | SIM CARD | SINGLE TYPE | NUMBER OF POSITIONS | R:RoHS | H:HALOGEN FREE | FOLLOW NUMBER | NON PUSH | NO SHELL | PLATING SEE TABLE

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
1	GOLD 5u"	4	GOLD 20u"
2	GOLD 10u"	6	GOLD 30u"
TOLERANCE .0=±0.35 .00=±0.25 .000=±0.05 ANG.=±3°		DRAWER CHECK APP'D PRODUCT SPEC.	
UNITS : mm		DRAW NO. R5100106-X2001S-X	
SCALE NONE	SIZE A9	SHEET 1 OF 1	REV. C

INMO
东莞市英墨电子有限公司
INMO Electronics Co.,Ltd

NAME
SIM CARD 6 PIN CONNECTOR